

APPROVAL SHEET

CUSTOMER	茂瑞
CUSTOMER P/N	
DESCRIPTION	12V/7A
EDAC MPN	EA10951C(N10)
EDAC MODEL NO FOR SAFETY	EA10951C-120
DATE	2015-11-08
REVISION	0

APPROVED	DESIGN	PREPARE	RoHS
葉慶兵	孫其俊	孫其俊	
CONCLUSION 判定結果	APPROVED 承認	CONDITON APP'D 有條件承認	CUSTOMER'S SIGNATURE: 客戶簽章:



翌勝電子股份有限公司
EDAC POWER ELECTRONICS CO., LTD.
 新北市中和區建一路 150 號 11 樓之 2(E 棟)
 TEL:886-2-82263289 FAX:886-2-82263327

翌勝電子(蘇州)有限公司
 Edac Power Electronics (Suzhou) Co., Ltd.
 江蘇省蘇州工業園區勝浦鎮常勝路 59 號
 No.59, Chang Sheng Road, Sheng Pu,
 Suzhou Industrial Park, Jiangsu, China
 Tel: 512-6282-1628 Fax: 512-6282-9608

深圳市成勝源電子有限公司
 深圳市龍崗區龍城街道五聯社區同心工業區 8 號廠房
 Tel: 0755-89383108 Fax: 0755-89383106

Index

1. General Description
2. Input Electrical Specification
3. Output Electrical Specification
4. Reliability Specification
5. Environmental Specification
6. Safety Specification
7. Mechanical Specification

1. General Description

The purpose of the document is to specify a Single phase AC input, single output switching power supply. This specification is suitable for: EA10951C_12V

This product is AC to DC switching power transfer device, it can provide for 12V, 7 A max & 84W max DC output with constant voltage source. This

Specification defines the input, output, performance characteristics, environment, noise and safety requirement for a power supply.

2. Input Electrical Specification

2-1. Input Voltage

Maximum Voltage:	264Vac
Normal Voltage:	100~240Vac
Minimum Voltage:	90Vac

2-2. Input Frequency

Maximum Frequency:	63Hz
Normal Frequency:	50~60Hz
Minimum Frequency:	47Hz

2-3. Input Current

- A. 1.5A Max. @ 115Vac input with full load.
- B. 0.75A Max. @ 230Vac input with full load.

2-4. Energy Saving Standard:

- A. Average Efficiency 88% under normal line input.
- B. No load power consumption: 0.21W at normal line input.

2-5. Configuration

3-wire AC input (Line, Neutral, FG)

2-6. Input Fuse

The hot line side of the input shall have a fuse, rating T3.15A/250V.

2-7. Inrush Current

- 60A at 110 Vac At cold start, maximum load.
- 120A at 220 Vac At cold start, maximum load.

2-8. Line Regulation

This line regulation is less than $\pm 1\%$, of rated output voltage @ full load.

2-9. Hold Up Time

10 mSec., @ normal line, with full load.

2-10. Rise Time

50 mSec., @ rated AC input, with full load from 10% to 90% of output voltage.

2-11. Turn-ON Time

The output voltage should rise to 90% of rated output voltage in less than 3 SEC. from AC voltage apply.

2-12. Harmonic Standard and Power Factor

The adapter complied with IEC 61000-3-2 Class D harmonic standard while input power over than 75W. The PF shall > 0.95@100Vac input and >0.9@240Vac input with full load.

3. Output Electrical Specification

3-1. Output Voltage and Current

Output Voltage (V)	Current Min.(A)	Current Max.(A)
+12	0	7.0

3-2. Load Regulation

Voltage (V)	Output Voltage Range
+12	11.4V – 12.6V

3-3. Dynamic Load Regulation

±5% excursion for 50% - 100% or 100% - 50% load change of DC output at any frequency up to 1KHz (duty 50%).

3-4. Ripple & Noise

The power supply shall not exceed the following limits on the indicated voltage for 60Hz or 50Hz ripple, Switching frequency ripple and noise and measured with a 20MHz bandwidth

Output	Ripple/Noise
+12V	180mV(PK)

Input condition : for rated voltage , Output condition : for max load

Ripple / Noise: 60Hz ripple + switching ripple and noise

Ripple & Noise is measured at the end of output cable which is added a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor

3-5. Over Voltage Protection

150% Max. of the rated output voltage.

The adapter shall have over-voltage protection with auto-recovery mode when output voltage reaches the trigger point of OVP or during the feedback open loop condition.

3-6. Over Current Protection

110%~150% of rated output current.

The adapter can withstand continuous short at DC output and no damage.

It will enter into normal condition if the fault condition is removed.

3-7. Stability

2% Max. at constant load with constant input (after 30 minutes of operation).

3-8. Drop-out (Power Line Disturbance)

Output voltage shall remain within the specified regulation range, through the absence of a line input during 1/2 cycle, at full load and normal AC line input

3-9. Voltage Isolation

The DC ground will be isolated from the AC neutral and AC line.

4. Reliability Specification

4-1. MTBF (MIL-STD-781D)

The power supply shall be designed and produced to have a mean time between failures (MTBF) of 30,000 operating hours at 90% confidence-level while operating under the testing conditions.

5. Environment Specification

5-1 Temperature

- a. Operating : 0 to 40
- b. Storage : -20 to 85

5-2 Humidity

- a. Operating : 10 to 90 %
- b. Storage: 5 to 90 %

5-3 Altitude

From sea level to 2,000 Meters (operation) and 5,000 Meters (non operation)

6. Safety Specification

6-1. Hi-Pot Test

1800Vac, 3mA, 2 seconds between primary and secondary circuit.

6-2. Insulation Test

500Vdc, 3 Sec. between primary and secondary circuit
IR should 50 MΩ.

6-3. Leakage Current

250uA, at 240Vac/50 Hz

6-4. Safety

UL/CUL, TUV, CB, CE, FCC, CCC, BSMI

6-5. EMS

Items	Specification	Reference
ESD	Contact: ± 4KV	IEC 61000-4-2
	Air: ± 8KV	
RS	Frequency: 80~1000MHz Field Strength: 3V/M , 80% AM(1KHz)	IEC 61000-4-3
EFT	1.0 KV on input AC power ports.	IEC 61000-4-4
SURGE	Line to Line: ± 1KV (peak)	IEC 61000-4-5
	Line to F.G : ± 2KV (peak)	

6-6. EMI

Comply with Standards
CISPR 22, EN 55022 Class B

7. Mechanical Specification

7-1. Physical Size : 137mm (L) * 59 mm (W) * 34 mm (H)

7-2. Enclosure material : 94V-0 minimum

7-3. Output Cable (Reference): UL1866 #14

7-4. Vibration Test

The vibration frequencies are set at 20Hz, with total amplitude of 1.5mm
Along the 3 directions namely X-Y-Z. The each direction should be vibrated
for 60 minutes, after testing no abnormal electrical or mechanical should occur.

7-5. Drop Test (Referencing to CSA C22.2 No.950/UL1950/UL1310/EN60950)

Products shall be dropped from a height of 900 mm onto a horizontal surface
consists of hardwood at 13mm thick, mounted on two layers of plywood each
19mm to 20mm thick, all supported on a concrete or equivalent non-resilient
floor. Upon conclusion of test, the equipment need not be operational.

7-6. Net Weight (Reference) : 450 g

EDAC EDACPOWER ELEC.

AC ADAPTER 电源适配器 電源供應器

MODEL 型号 型號: EA10951C-120

AC INPUT 输入 輸入: 100-240V~2.5A, 50-60Hz

DC OUTPUT 输出 輸出: 12V== 7A

CAUTION 注意 注意

FOR INDOOR USE ONLY 室内产品使用 室內產品使用
I.T.E. USE ONLY

DATE CODE:

出厂日期
出廠日期

15	16	17			1	2	3	4	5
1	2	3	4	5	6	7	8	9	0



I.T.E. POWER SUPPLY

41TJ

E209833



LPS



R33147



RoHS



制造商: 翌胜电子股份有限公司



MADE IN CHINA 中国制造 中國製造
1312 C3

P/N.: 312

Background: Black color

Character: Silver color

Unit: mm

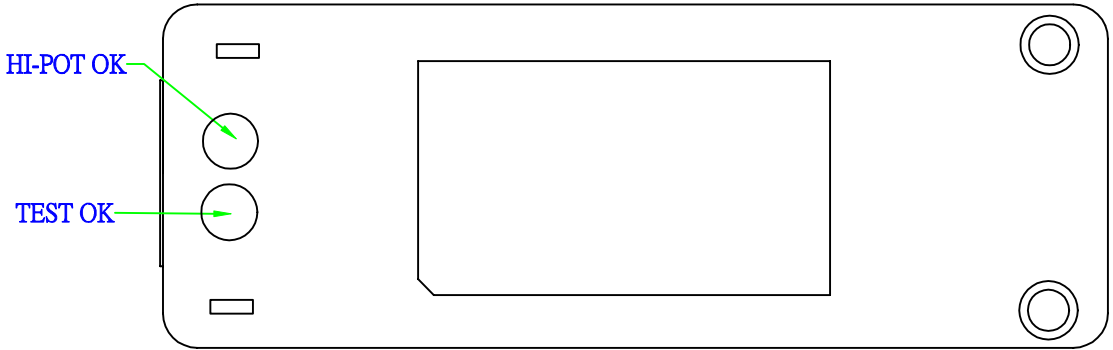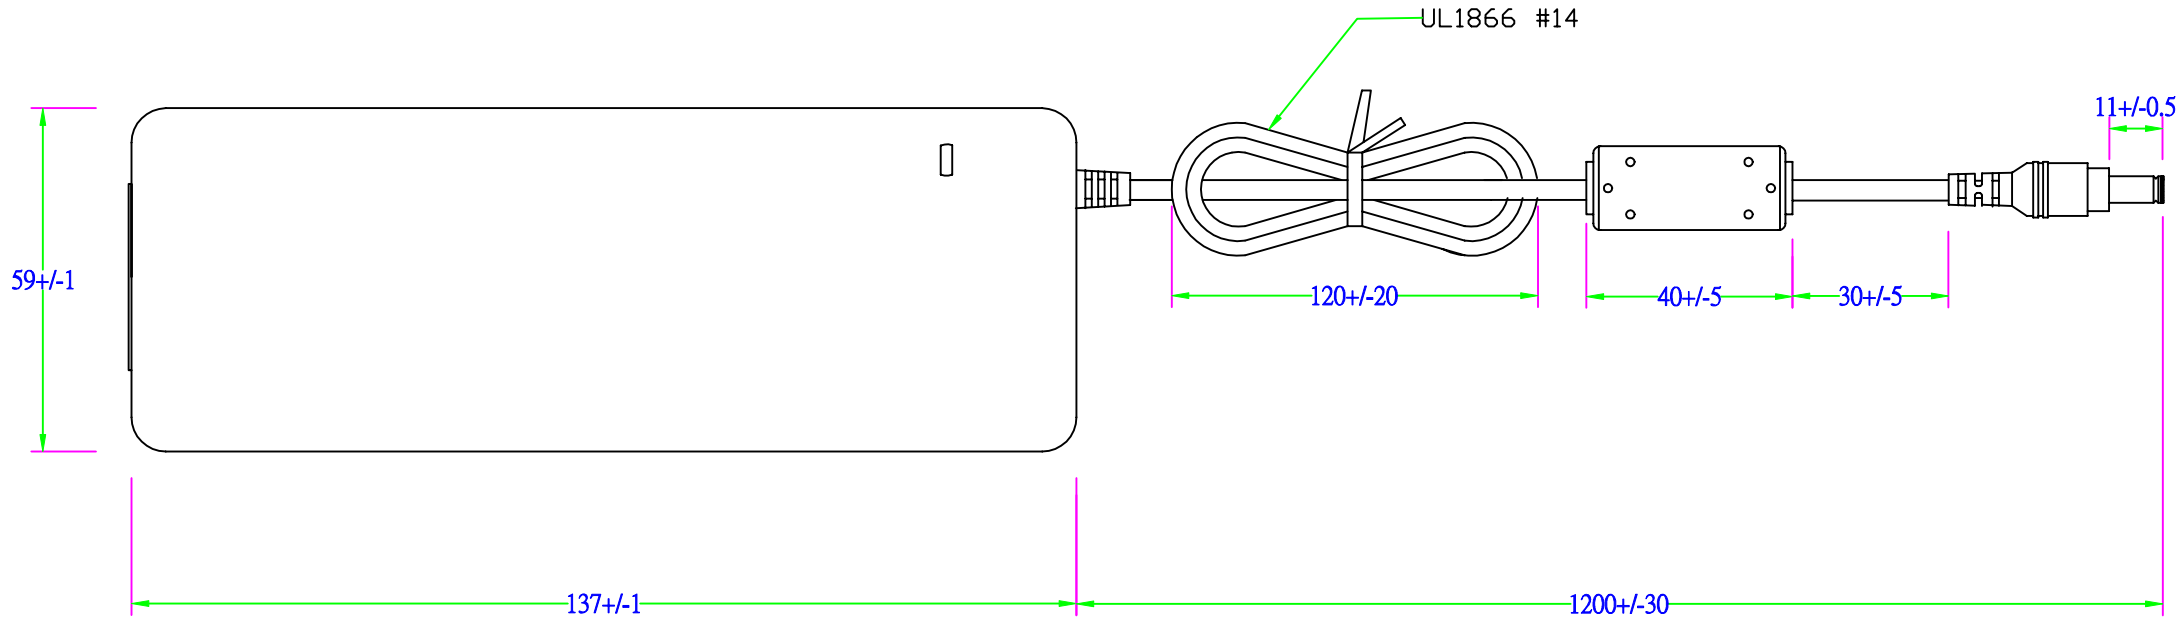

EDACPOWER ELEC.				APPROVED
MODEL	EA10951C(N10)	UNIT	mm	DESIGNED
color	BLACK	SCALE		CHECK
cus.		DATE	2015-11-08	DRAWING L.J.YU